





State Route (SR) 347 Improvement Project



ADOT has several planned improvements on the State Route 347 corridor between Interstate 10 and State Route 238 in the City of Maricopa, mostly located within the Gila River Indian Community

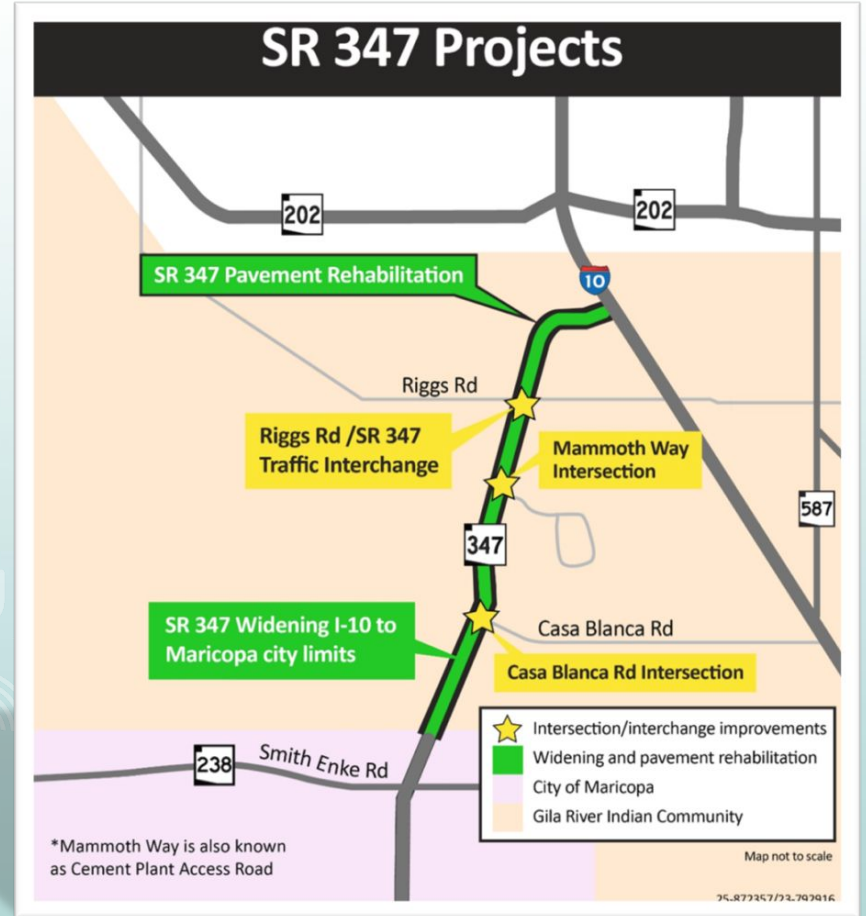


- Widening (one lane in each direction) from I-10 to the city of Maricopa (MP 189.2 to 174.4)
- Improvements at intersections
- Upgrades to existing intersections at Maricopa Road and Casa Blanca Road
- Borgia (Sacate) Road median closure
- Grade separated intersection at Cement Plant/Mammoth Way (MP 182.5)
- Grade separated traffic interchange at Riggs Road
- Rehabilitation of existing pavement

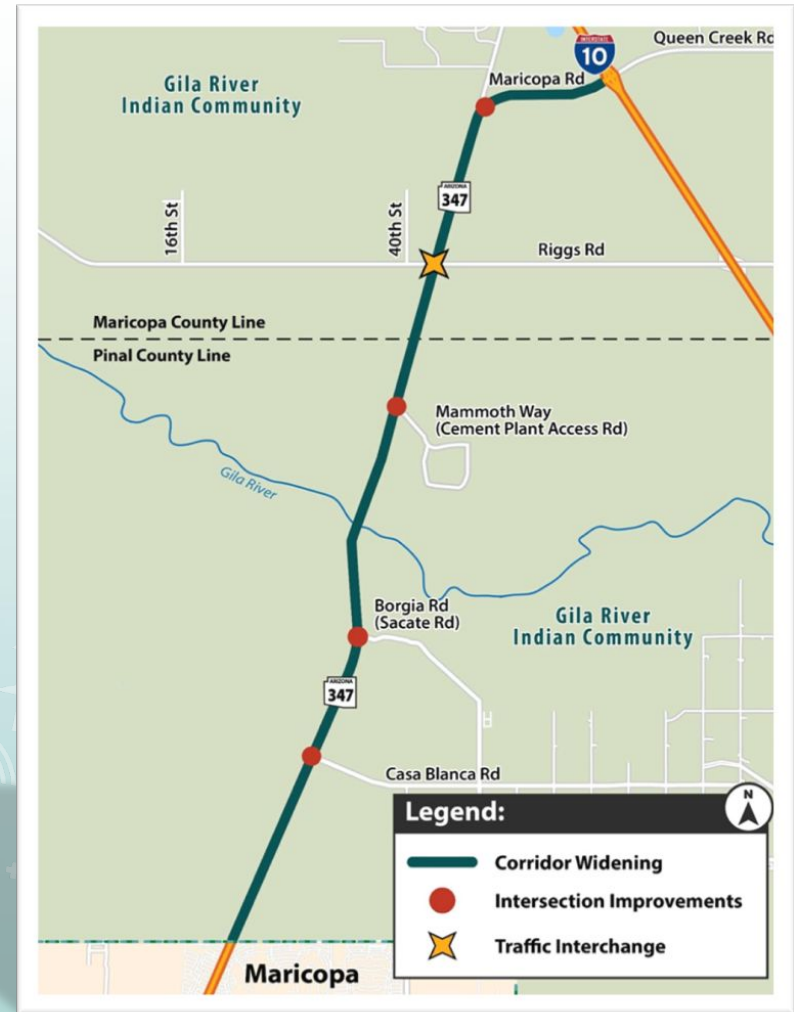

Widening


- Adds one general-purpose lane each direction within existing right of way
- ~14.8 miles from I-10 to City of Maricopa limits (entire project)
- Inside widening south of Maricopa Road; add concrete median barrier; modernize shoulders
- Widening both inside and outside from Maricopa Road to I-10

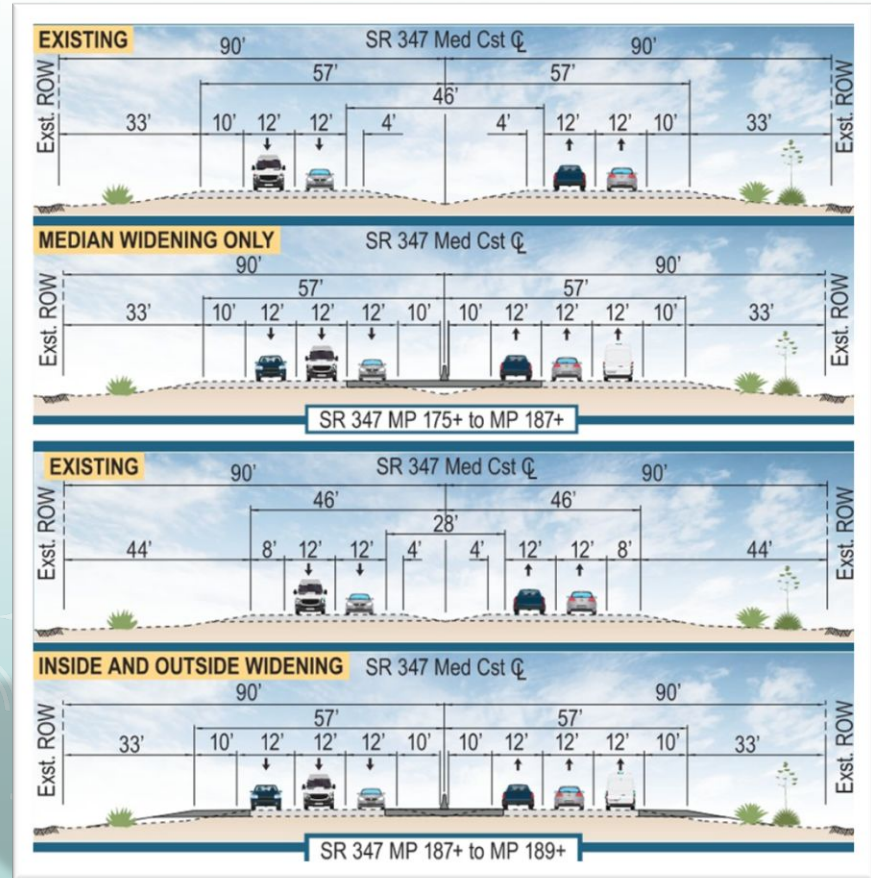

Bridges

Widen existing bridges,
extend culverts and
drainage crossings:

- Gila River
- Santa Cruz Wash
- Santa Rosa Wash


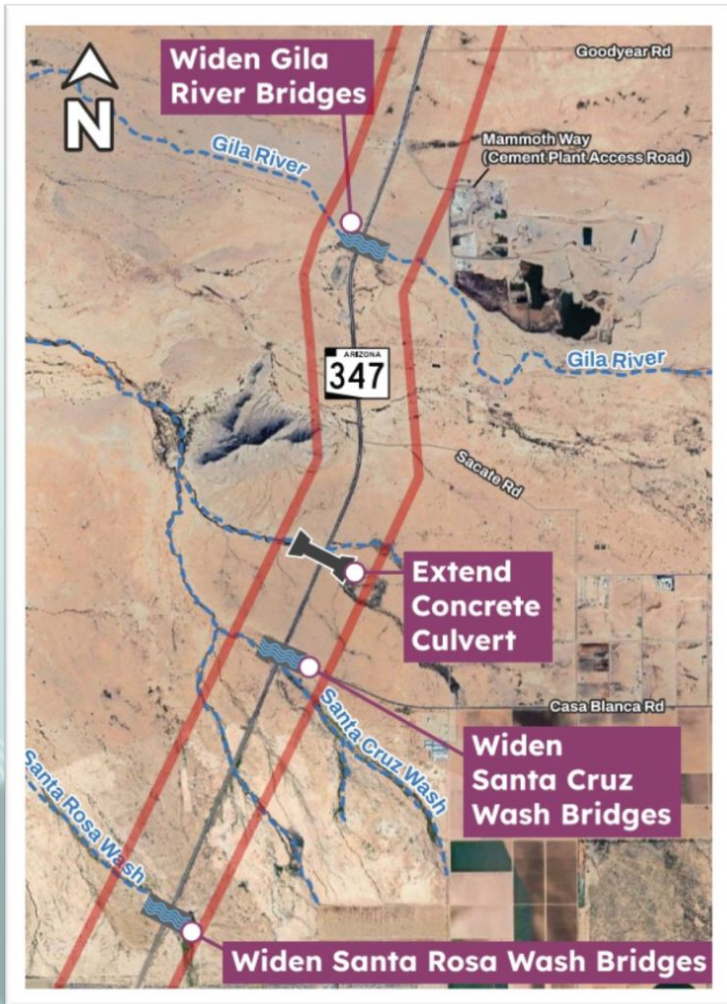


Intersection Improvements


Intersection Location	Existing Location	Improvement Type
Old Maricopa Rd	Signalized Florida T-Intersection	Signalized (Improved) Florida T with Separation Barrier and dual lefts from SR 347
Borgia Rd (Sacate Rd)	NA (Driveway with Full Access)	Right-in/Right-out (No Signal)
Casa Blanca Rd	Signalized T-Intersection	Improved Signalized T-intersection with extended right- and left-turn lanes

Grade Separation Improvements @ Mammoth Way

- Convert Mammoth Way to a grade-separated bridge crossing and cement plant access
- Eliminates signalized stops along SR 347 mainline; improves mainline and crossroad operation
- Mammoth Way traffic is carried over SR 347 mainline
- Acceleration and deceleration lanes to right turns, with access over SR 347

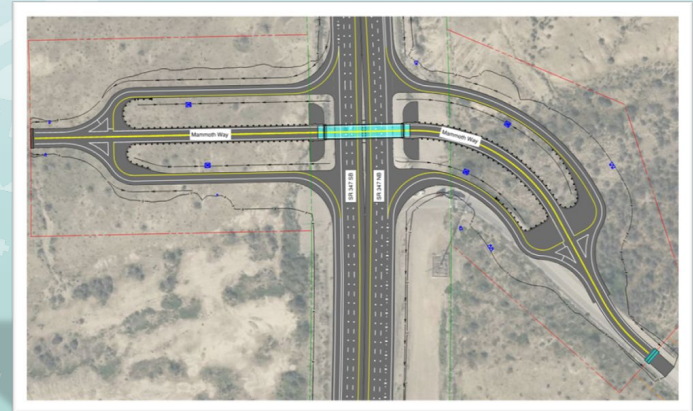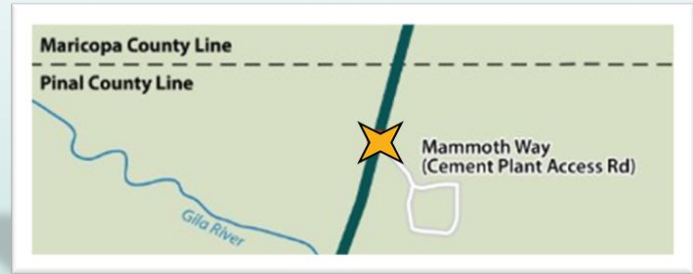

Interchange Improvements at Riggs Road

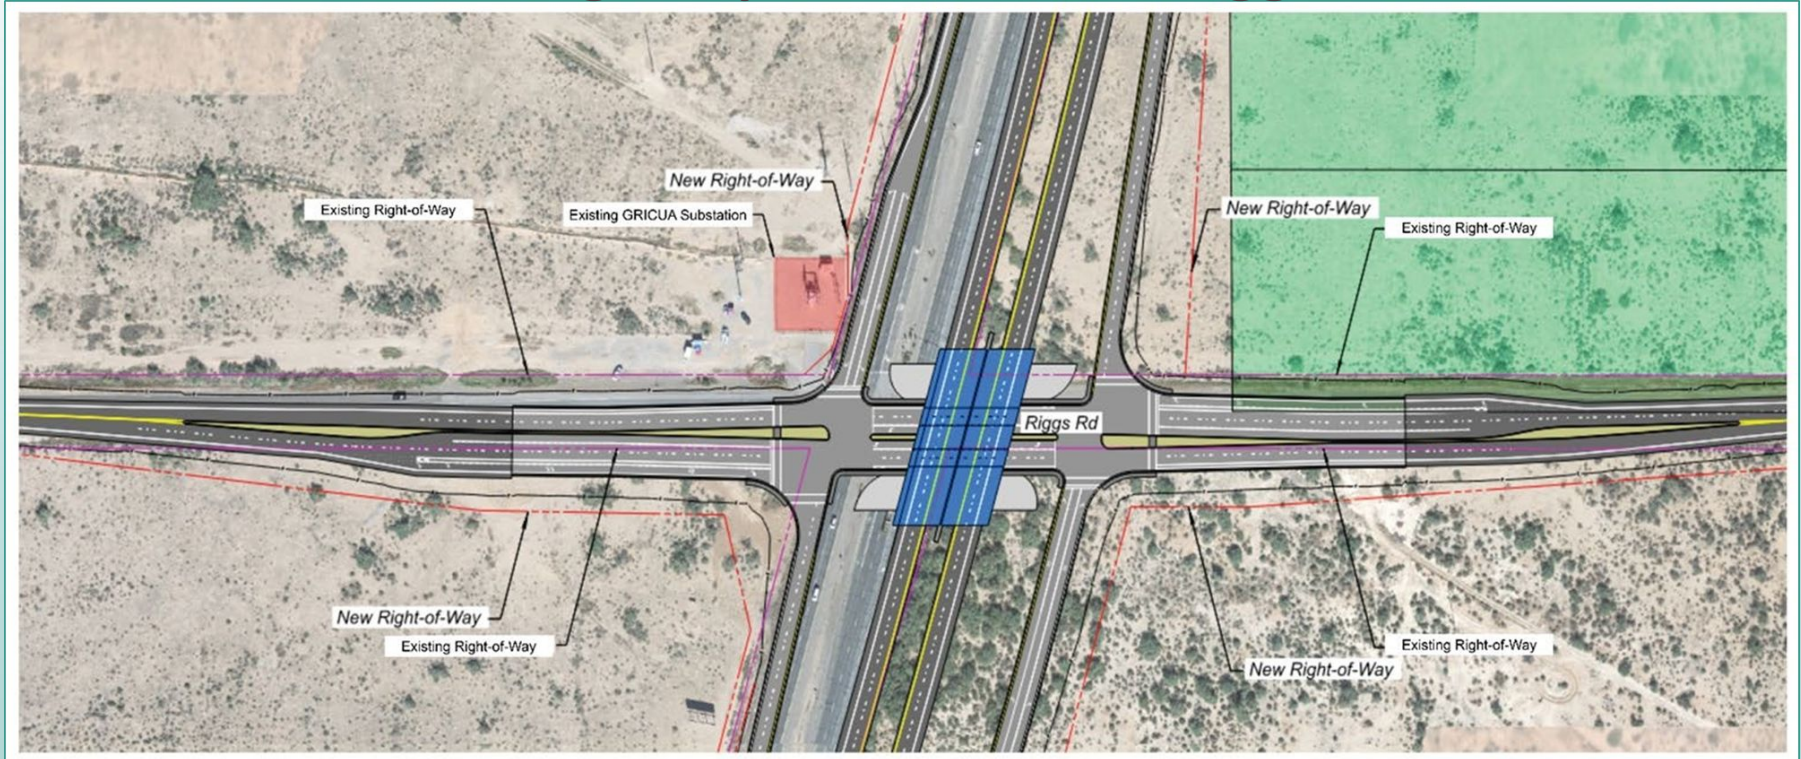

State Route (SR) 347 CMAR Procurement Schedule

- Industry Forum – September 30, 2025
- RFQ Advertisement – October 30, 2025
- SOQs Due – December 12, 2025
- Evaluation Team review SOQs – December 16 to January 6
- Evaluation Team consensus meeting – January 7 & 8
- Notification of Final List – by January 16, 2026
- Kickoff meeting – one week from notification
- Preconstruction Contract (anticipated) – by February 17, 2026
- Early Construction work – Summer 2026

Thank you!

Questions?